


Ball Valves - Manual and Actuated

Stainless Steel 2 Piece Screwed with Electric Actuator

FIG 241-EA - with Electric Actuator

Dimensions

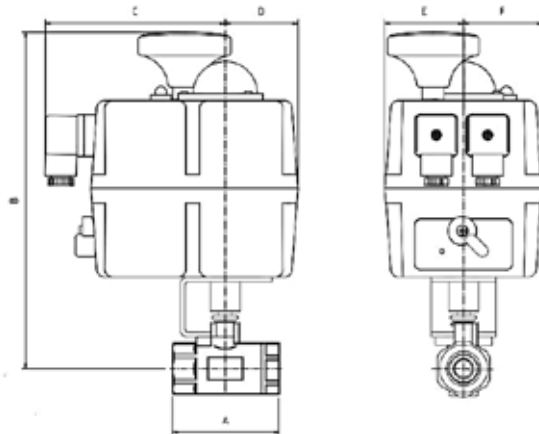

2 Piece Screwed with Electric Actuator With 110-240V AC/DC and 12-24V AC/DC options

Nominal Valve Size		Electric Actuator	A	B	C	D	E	F
in	mm		mm	mm	mm	mm	mm	mm
¼	8	Model 20	52	228	126	51	55	55
⅜	10	Model 20	52	228	126	51	55	55
½	15	Model 20	64	229	126	51	55	55
¾	20	Model 20	75	231	126	51	55	55
1	25	Model 20	79	236	126	51	55	55
1¼	32	Model 20	101	240	126	51	55	55
1½	40	Model 20	109	250	126	51	55	55
2	50	Model 20	123	259	126	51	55	55

For valve and actuator specifications refer to: FIG LN240 (2 Piece Screwed) and BOSS EA218 (Electric Actuators)

The BOSS 241-EA is supplied fully assembled and tested

Can be supplied failsafe (fail open or closed), or modulating (0-10V or 4-20mA). See our plug and play conversion kits (EA218 section)