

Butterfly Valves - Manual and Actuated

Ductile Iron Lugged with Electric Actuator

FIG 358LE-EA / 358LB-EA - with Electric Actuator

Dimensions

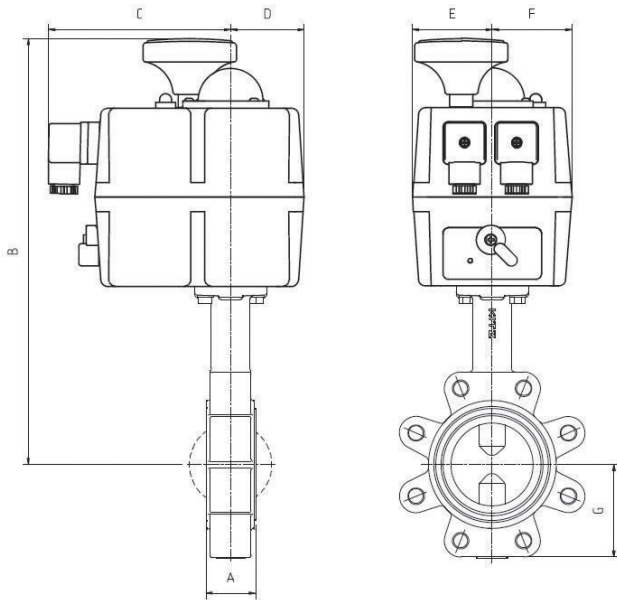


FIG 358LE - Lugged, EPDM
FIG 358LB - Lugged, NBR (Buna-N)

EA - Electric Actuator

Ductile Iron Lugged Butterfly Valve with Electric Actuator

With 110-240V AC/DC and 12-24V AC/DC options (Low voltage for Models 140 & 300 is 24V AC/DC)

Nominal Valve Size in	mm	Electric Actuator	A mm	B mm	C mm	D mm	E mm	F mm	G mm
2	50	Model 20	43	318	126	51	55	55	67
2½	65	Model 20	46	326	126	51	55	55	75
3	80	Model 35	46	350	126	51	55	55	91
4	100	Model 55	52	379	126	51	55	55	104
5	125	Model 85	56	467	126	51	55	55	127
6	150	Model 85	56	479	126	51	55	55	139
8	200	Model 140	60	524	126	51	55	55	169
10	250	Model 300	68	558	107	107	128	107	219

For valve and actuator specifications refer to: FIG 357 (DI Butterfly Valve) and BOSS™ EA218 (Electric Actuators)

The BOSS™ 358LE-EA / 358LB-EA is supplied fully assembled and tested

Can be supplied failsafe (fail open or closed), or modulating (0-10V or 4-20mA). See our plug and play conversion kits (EA218 section)

Media - For any application with media suitable to material of construction