
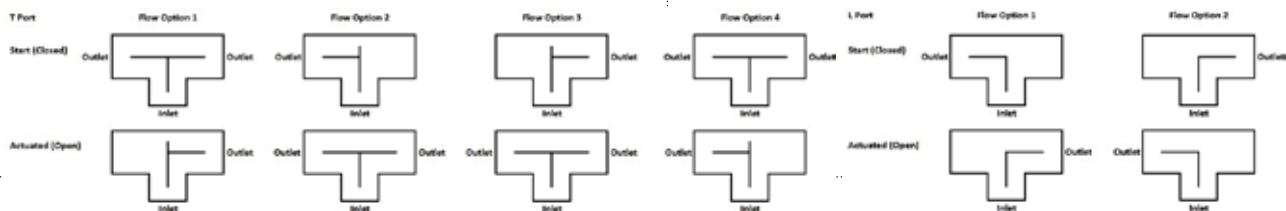


Ball Valves - Manual and Actuated

Stainless Steel 3-Way L & T Port with Electric Actuator

FIG B231L-EA / B232T-EA with Electric Actuator

Dimensions

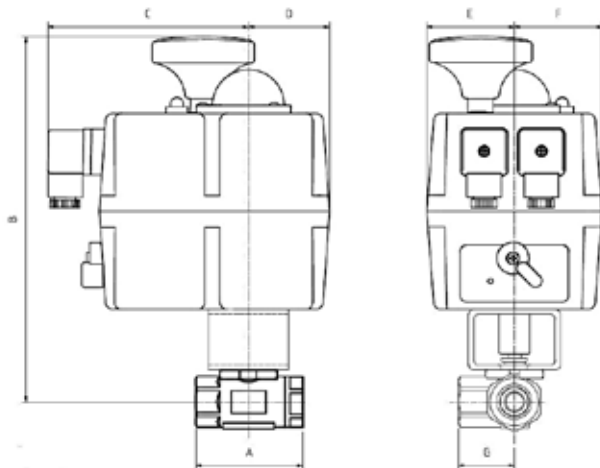

3-Way L Port with Electric Actuator

3-Way T Port with Electric Actuator

With 110-240V AC/DC and 12-24V AC/DC options

Nominal Valve Size		Electric Actuator	A mm	B mm	C mm	D mm	E mm	F mm	G mm
in	mm								
1/2	15	Model 20	67	231	126	51	55	55	35
3/4	20	Model 20	78	236	126	51	55	55	39
1	25	Model 20	90	243	126	51	55	55	45
1 1/4	32	Model 35	102	251	126	51	55	55	51
1 1/2	40	Model 35	109	281	126	51	55	55	54
2	50	Model 55	135	286	126	51	55	55	55

For valve and actuator specifications refer to: FIG B230L (L Port), FIG B230T (T Port) and BOSS EA218 (Electric Actuators)

The BOSS B231L-EA and BOSS B232T-EA are supplied fully assembled and tested

FIG B231L-EA offered with Flow Options 1 & 2

FIG B232T-EA offered with Flow Options 1, 2, 3 & 4

Can be supplied failsafe (fail open or closed). See our plug and play conversion kits (EA218 section)