


Ball Valves - Manual and Actuated

Stainless Steel 3 Piece with Electric Actuator

FIG B381-EA / B382-EA - Screwed / Socket Weld with Electric Actuator

Dimensions

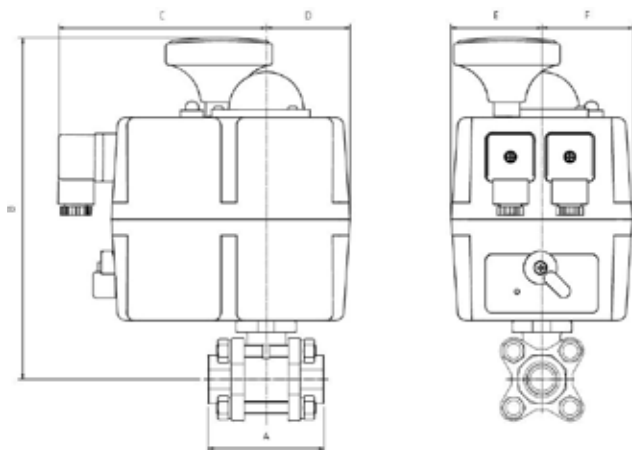

Screwed Ball Valve with Electric Actuator
Socket Weld Ball Valve with Electric Actuator
With 110-240V AC/DC and 12-24V AC/DC options

| Nominal Valve Size | | Electric Actuator | A mm | B mm | C mm | D mm | E mm | F mm |
|--------------------|----|-------------------|---------|---------|---------|---------|---------|---------|
| in | mm | | | | | | | |
| ½ | 15 | Model 20 | 70 | 206 | 126 | 51 | 55 | 55 |
| ¾ | 20 | Model 20 | 77 | 210 | 126 | 51 | 55 | 55 |
| 1 | 25 | Model 20 | 92 | 218 | 126 | 51 | 55 | 55 |
| 1¼ | 32 | Model 20 | 105 | 228 | 126 | 51 | 55 | 55 |
| 1½ | 40 | Model 35 | 120 | 236 | 126 | 51 | 55 | 55 |
| 2 | 50 | Model 55 | 138 | 273 | 126 | 51 | 55 | 55 |

For valve and actuator specifications refer to: FIG 380DD (Screwed), FIG 380DX (Socket Weld) and BOSS EA218 (Electric Actuators)

The BOSS 381-EA and BOSS 382-EA are supplied fully assembled and tested

Can be supplied failsafe (fail open or closed), or modulating (0-10V or 4-20mA). See our plug and play conversion kits (EA218 section)