
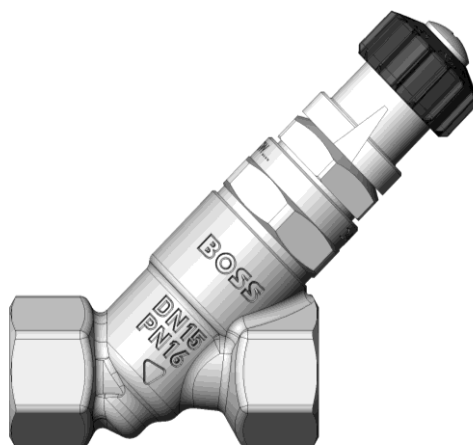


## 205 TBV

### Dimensions

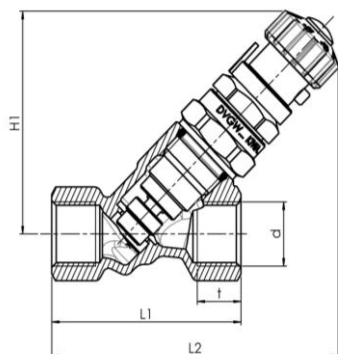

| Size DN | H1 mm | L1 mm | L2 mm | t mm | d      | Weight kg | Product Code |
|---------|-------|-------|-------|------|--------|-----------|--------------|
| 15      | 73    | 65    | 98    | 15   | Rp 1/2 | 0.36      | 20510102     |
| 20      | 80    | 75    | 106   | 16.5 | Rp 3/4 | 0.52      | 20510113     |

### Technical Specification

|                                                                                                    |                        |
|----------------------------------------------------------------------------------------------------|------------------------|
| Pressure Rating                                                                                    | PN16                   |
| Maximum Temperature                                                                                | 90°C                   |
| Regulating Range adjustable between                                                                | 50°C - 65°C            |
| Factory Setting                                                                                    | 58°C                   |
| Thermal Disinfection starts at                                                                     | 70°C                   |
| Connection                                                                                         | BSPT Female EN 10226-1 |
| Wetted parts made of red brass, No stagnant spaces inside the valve, resistant to aggressive water |                        |

### Materials of Construction

|                       |                             |
|-----------------------|-----------------------------|
| Body                  | Red Brass BS EN 1982 CC499K |
| Bonnet (wetted parts) | Red Brass BS EN 1982 CC499K |
| Cone                  | Red Brass BS EN 1982 CC499K |
| O-Ring                | EPDM                        |

## 205 TBV Flow Data

