


Ball Valves - Manual and Actuated

Stainless Steel 2 Piece Flanged CLASS 150 with SR / DA Pneumatic Actuator

FIG 204-SR with Spring Return Actuator

FIG 204-DA with Double Acting Actuator

Dimensions

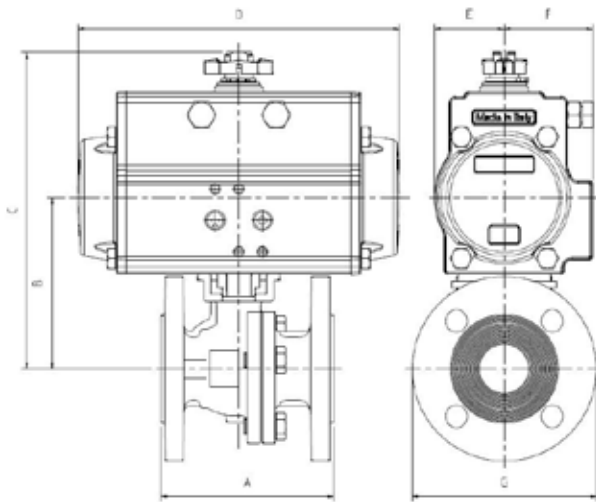

2 Piece Flanged CLASS 150 with SR Actuator

Nominal Valve Size		Spring Return Actuator	A mm	B mm	C mm	D mm	E mm	F mm	G mm
in	mm								
½	15	SR63	108	101	187	164	35	45	90
¾	20	SR75	117	114	210	210	42	52	100
1	25	SR85	127	129	232	240	47	58	110
1½	40	SR100	165	122	230	275	55	68	125
2	50	SR115	178	135	192	333	64	73	150
2½	65	SR125	190	166	309	372	68	80	180
3	80	SR140	203	187	343	435	76	87	190
4	100	SR160	229	210	381	500	87	99	230
6	150	SR180	394	254	438	493	98	115	280
8	200	SR230	457	457	720	690	124	124	345

2 Piece Flanged CLASS 150 with DA Actuator

Nominal Valve Size		Double Acting Actuator	A mm	B mm	C mm	D mm	E mm	F mm	G mm
in	mm								
½	15	DA52	108	100	175	141	30	41	90
¾	20	DA52	117	105	180	141	30	41	100
1	25	DA63	127	114	200	164	35	45	110
1½	40	DA63	165	106	191	164	35	45	125
2	50	DA75	178	126	222	210	42	52	150
2½	65	DA85	190	153	256	240	47	58	180
3	80	DA100	203	160	158	275	55	68	190
4	100	DA115	229	180	322	333	64	73	280
6	150	DA115	394	213	355	333	64	73	280
8	200	DA160	457	445	616	500	87	99	345

For valve and actuator specifications refer to: FIG 203B (2 Piece CLASS 150) and FIG 82 (Pneumatic Actuators)

Actuated packages are supplied fully assembled and tested. Actuator sizing based on 5.5 bar air supply

FIG 204-SR supplied with Fail Open and Fail Closed options

For additional options (silencers, switchboxes and solenoids) refer to our Accessories section

FIG 204-DA supplied Stay Put as standard, with switchbox available

Media - For any application with media suitable to material of construction