


Ball Valves - Manual and Actuated

Stainless Steel 2 Piece Flanged PN16 with SR / DA Pneumatic Actuator

FIG 205-SR with Spring Return Actuator
FIG 205-DA with Double Acting Actuator

Dimensions

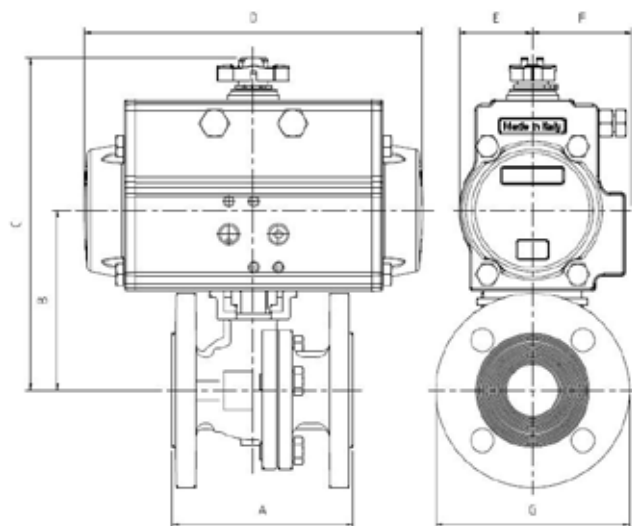

2 Piece Flanged PN16 with SR Actuator

Nominal Valve Size		Spring Return Actuator	A mm	B mm	C mm	D mm	E mm	F mm	G mm
in	mm								
1/2	15	SR63	115	101	187	164	35	45	95
3/4	20	SR75	120	114	210	210	42	52	105
1	25	SR85	125	129	232	240	47	58	115
1 1/2	40	SR100	140	127	235	275	55	68	150
2	50	SR115	150	147	205	333	64	73	165
2 1/2	65	SR125	170	168	312	372	68	80	185
3	80	SR140	180	194	350	435	76	87	200
4	100	SR160	190	205	376	500	87	99	220
6	150	SR180	350	256	440	493	98	115	285
8	200	SR230	400	457	720	690	124	124	340

2 Piece Flanged PN16 with DA Actuator

Nominal Valve Size		Double Acting Actuator	A mm	B mm	C mm	D mm	E mm	F mm	G mm
in	mm								
1/2	15	DA52	115	100	175	141	30	41	95
3/4	20	DA52	120	105	180	141	30	41	105
1	25	DA63	125	114	200	164	35	45	115
1 1/2	40	DA63	140	123	209	164	35	45	150
2	50	DA75	150	123	219	210	42	52	165
2 1/2	65	DA85	170	155	258	140	47	58	185
3	80	DA100	180	115	223	275	55	68	200
4	100	DA115	160	205	302	333	64	73	220
6	150	DA115	350	215	358	333	64	73	285
8	200	DA160	400	445	616	500	87	99	340

For valve and actuator specifications refer to: FIG 203H (2 Piece PN16) and FIG 82 (Pneumatic Actuators)

Actuated packages are supplied fully assembled and tested. Actuator sizing based on 5.5 bar air supply

FIG 205-SR supplied with Fail Open and Fail Closed options

For additional options (silencers, switchboxes and solenoids) refer to our Accessories section

FIG 205-DA supplied Stay Put as standard, with switchbox available

Media - For any application with media suitable to material of construction