

MODEL

BOSS 84 VOX

Code: 80630131

SUBMERSIBLE PUMP FOR DIRTY WATER APPLICATIONS

HEAD
UP TO
7 MTS

FLOW
UP TO
5.5 L/S

FLOAT
AUTO
YES

SUPPLY
VOLTS
230 V

All BOSS products are supplied with the confidence of high quality and reliability as standard.

- Full service & technical back up



DURABILITY



Ultra strong
cast stainless steel
impeller

OPERATION



Automatic float switch
control

CAPABILITY



Solids handling up
to 50 mm

INSTALLATION



Fitted with 10 Metres
of mains cable

BOSS 84

TECHNICAL SPECIFICATION



HEAD UP TO	7 METRES
FLOW UP TO	5.5 L/SEC
CLOSED VALVE	7.3 METRES
MIN SUMP DIMENSION MM	H730 x W700 x D700
OUTLET SIZE	2" F BSP
IMMERSION DEPTH MAX	10 METRES
MIN WATER LEVEL	330 MM (auto)
SOLIDS HANDLING	50 MM
MAX LIQUID TEMP	50°C
MOTOR SIZE	0.55 KW
MAINS SUPPLY	230 VOLT
RUNNING CURRENT	4.2 AMPS
FLOAT SWITCH	YES
SUPPLY CABLE	10 METRES

APPLICATIONS

Stainless steel submersible electric pump with precision cast vortex impeller. Designed for pumping waste water containing solids in suspension up to a maximum of 50mm in diameter.

CONSTRUCTION FEATURES OF THE PUMP

Pump body, seal housing cover, motor casing and cap with handle made in stainless steel. Precision cast stainless steel impeller. AISI 304 Stainless steel motor shaft. Double mechanical seal arrangement with integral oil chamber (non toxic oil). Seal material in carbon/alumina on the motor end and highly durable carbide/silicon carbide on the pump end.

CONSTRUCTION FEATURES OF THE MOTOR

Dry asynchronous sealed motor type cooled by the pumped liquid. Rotor mounted on greased for-life bearings, oversized and selected to guarantee greater noise reduction and durability. Thermal overload motor protection as standard, auto-resetting.

Constructed in accordance with the IEC 2-3 IEC61-69 (EN 60335-2-41) standards.


Motor Protection Class: IP68 Insulation Class: F
Standard Voltage: 230 Volt 50Hz Single-Phase

Motor Rating: Continuous running with liquid at 35°C and pump completely submerged




MATERIALS

NO.	PARTS IN CONTACT WITH THE PUMPED LIQUID	MATERIALS
1	PUMP BODY	STAINLESS STEEL AISI 304
4	IMPELLER	MICRO CAST STAINLESS STEEL
7	MOTOR SHAFT	STAINLESS STEEL AISI 304
16	MECHANICAL SEAL	PUMP END SILICON CARBIDE/SILICON CARBIDE MOTOR END CARBON/ALUMINA
36	SEAL COVER	STAINLESS STEEL AISI 304
54	MOTOR CASING	STAINLESS STEEL AISI 304
120	HANDLE	STAINLESS STEEL AISI 304 WITH INSULATED RUBBER GRIP
	CABLE (MAINS & FLOAT SWITCH)	H07RNF (PCP TYPE EM2)

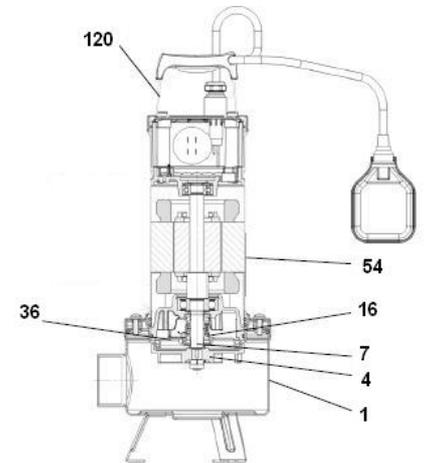


DIMENSIONS

MODEL	A	B	D	H	H1	DIA DNM	PACKAGING DIM			WEIGHT KG
							L/A	L/B	H	
BOSS 84	203	170	172	492	98	2" F BSP	240	600	240	16.3

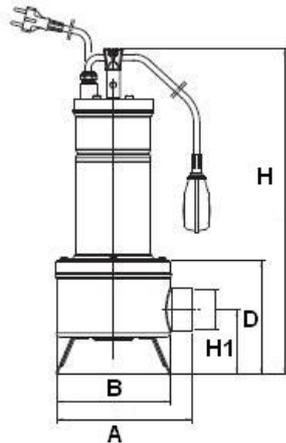

PERFORMANCE

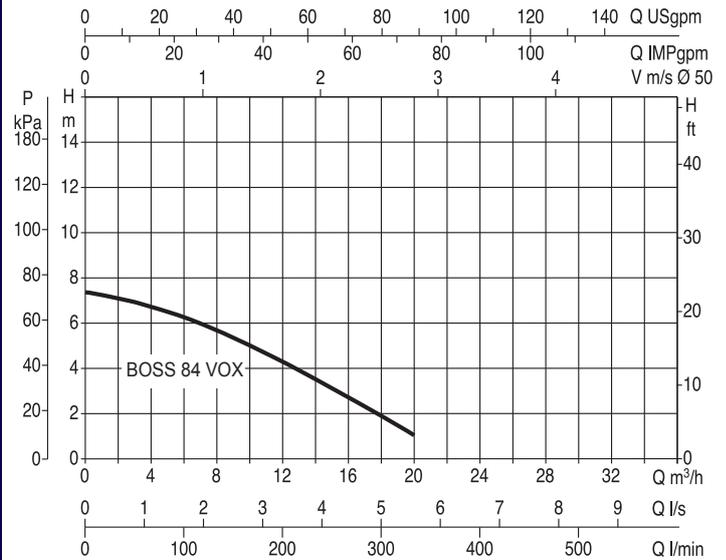

AMS Pumps

BSS | Specialist in Pumping Systems

Tel: 0870 609 2101
Email: ampumps@bssgroup.com
Web: www.bssindustrial.co.uk

The information contained in this publication is believed to be correct and complete at the time of printing but it is an approximate guide only. Due to limitations in the printing process, images may not be representative of their true colours and colour variations may occur due to the natural origin of the products. Stock may vary from branch to branch and is subject to availability. All photographs are a guide only and do not necessarily represent the products available. BSS Industrial reserves the right to change product details and designs without prior notice. To the fullest extent permitted by law, BSS Industrial assumes no liability or responsibility for typographical and clerical errors and omissions in this publication (which may be corrected by us without liability) and this publication does not form the basis of any contract. All products sold are subject to our Group Sale Terms, a copy of which are available on request or are otherwise available at www.bssindustrial.co.uk. Travis Perkins Group is the owner of the registered trademark BOSS.