


Ball Valves - Manual and Actuated

Stainless Steel 2 Piece Flanged CLASS 150 with Electric Actuator

FIG 204-EA - with Electric Actuator

Dimensions

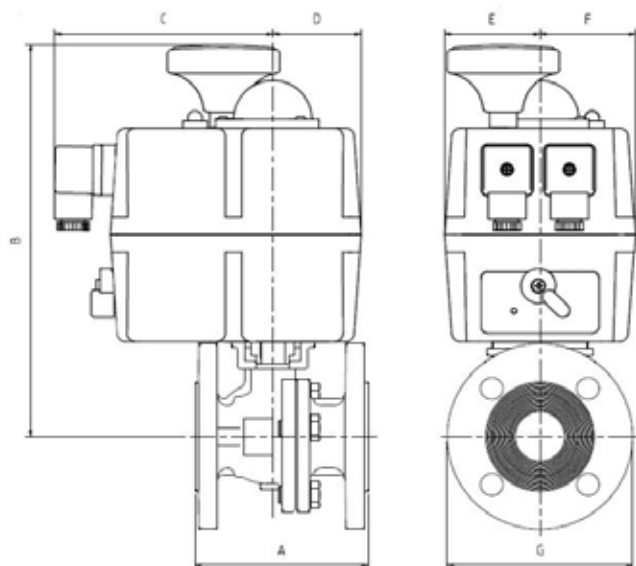

2 Piece Flanged CLASS 150 with Electric Actuator

With 110-240V AC/DC and 12-24V AC/DC options (Low voltage for Models 140 & 300 is 24V AC/DC)

Nominal Valve Size		Electric Actuator	A	B	C	D	E	F	G
in	mm		mm	mm	mm	mm	mm	mm	mm
½	15	Model 20	108	245	126	51	55	55	90
¾	20	Model 20	117	250	126	51	55	55	100
1	25	Model 20	127	258	126	51	55	55	110
1½	40	Model 35	165	249	126	51	55	55	125
2	50	Model 55	178	287	126	51	55	55	150
2½	65	Model 85	190	302	126	51	55	55	180
3	80	Model 140	203	364	128	107	107	107	190
4	100	Model 140	229	384	128	107	107	107	230
6	150	Model 300	394	417	128	107	107	107	280

For valve and actuator specifications refer to: FIG 203B (2 Piece CLASS 150) and BOSS EA218 (Electric Actuators)

The BOSS 204-EA is supplied fully assembled and tested

Can be supplied failsafe (fail open or closed), or modulating (0-10V or 4-20mA). See our plug and play conversion kits (EA218 section)