


Ball Valves - Manual and Actuated

Nickel Plated Brass 2 Piece Screwed with Electric Actuator

FIG 250-EA - with Electric Actuator

Dimensions

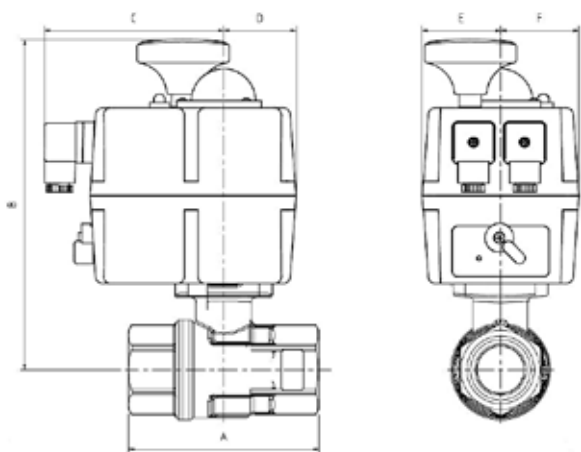

2 Piece Screwed with Electric Actuator With 110-240V AC/DC and 12-24V AC/DC options

Nominal Valve Size		Electric Actuator	A mm	B mm	C mm	D mm	E mm	F mm
in	mm							
1/4	8	Model 20	67	203	126	51	55	55
3/8	10	Model 20	67	203	126	51	55	55
1/2	15	Model 20	67	203	126	51	55	55
3/4	20	Model 20	76	205	126	51	55	55
1	25	Model 20	90	216	126	51	55	55
1 1/4	32	Model 20	102	220	126	51	55	55
1 1/2	40	Model 20	114	235	126	51	55	55
2	50	Model 20	138	244	126	51	55	55
2 1/2	65	Model 35	165	259	126	51	55	55
3	80	Model 35	188	269	126	51	55	55

For valve and actuator specifications refer to: FIG 2500 (2 Piece Screwed) and BOSS EA218 (Electric Actuators)

The BOSS 250-EA is supplied fully assembled and tested

Can be supplied failsafe (fail open or closed), or modulating (0-10V or 4-20mA). See our plug and play conversion kits (EA218 section)