


Ball Valves - Manual and Actuated

Stainless Steel 2 Piece Flanged PN16 with Electric Actuator
FIG 205-EA - with Electric Actuator

Dimensions

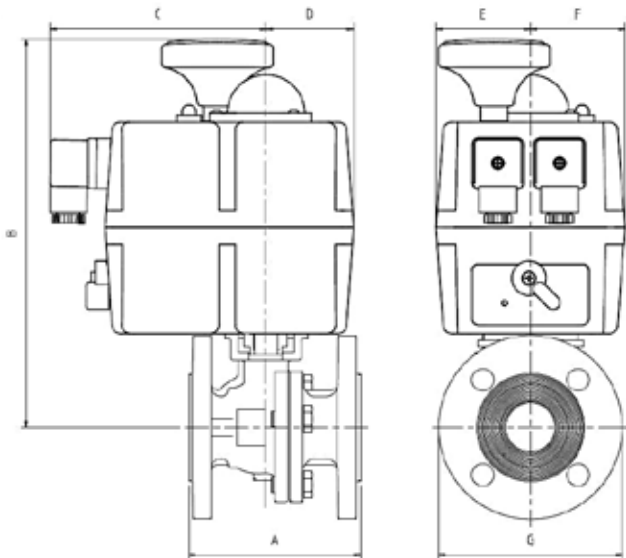

2 Piece Flanged PN16 with Electric Actuator With 110-240V AC/DC and 12-24V AC/DC options (Low voltage for Models 140 & 300 is 24V AC/DC)

Nominal Valve Size		Spring Return	A	B	C	D	E	F	G
in	mm	Actuator	mm	mm	mm	mm	mm	mm	mm
½	15	Model 20	115	245	126	51	55	55	95
¾	20	Model 20	120	250	126	51	55	55	105
1	25	Model 20	125	258	126	51	55	55	115
1½	40	Model 35	140	249	126	51	55	55	150
2	50	Model 55	150	287	126	51	55	55	165
2½	65	Model 85	170	302	126	51	55	55	185
3	80	Model 140	180	364	128	107	107	107	200
4	100	Model 140	190	384	128	107	107	107	220
6	150	Model 300	350	417	128	107	107	107	285

For valve and actuator specifications refer to: FIG 203H (2 Piece PN16) and BOSS™ EA218 (Electric Actuators)

The BOSS™ 205-EA is supplied fully assembled and tested

Can be supplied failsafe (fail open or closed), or modulating (0-10V or 4-20mA). See our plug and play conversion kits (EA218 section)