


Ball Valves - Manual and Actuated

Stainless Steel 2 Piece Screwed with SR / DA Pneumatic Actuator

FIG 241-SR with Spring Return Actuator
FIG 241-DA with Double Acting Actuator

Dimensions

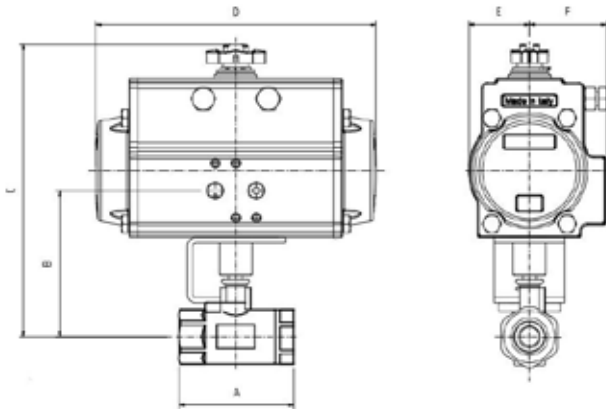

2 Piece Screwed with SR Actuator

Nominal Valve Size		Spring Return Actuator	A	B	C	D	E	F
in	mm		mm	mm	mm	mm	mm	mm
1/4	8	SR52	52	73	148	141	30	41
3/8	10	SR52	52	73	148	141	30	41
1/2	15	SR52	64	84	159	141	30	41
3/4	20	SR52	76	91	166	141	30	41
1	25	SR52	79	101	176	141	30	41
1 1/4	32	SR75	101	117	213	210	42	52
1 1/2	40	SR75	109	134	230	210	42	52
2	50	SR85	123	159	253	240	47	58

2 Piece Screwed with DA Actuator

Nominal Valve Size		Double Acting Actuator	A	B	C	D	E	F
in	mm		mm	mm	mm	mm	mm	mm
1/4	8	DA32	52	69	112	110	22	22
3/8	10	DA32	52	69	112	110	22	22
1/2	15	DA32	64	80	123	110	22	22
3/4	20	DA32	75	87	130	110	22	22
1	25	DA32	79	97	140	110	22	22
1 1/4	32	DA52	101	115	190	141	30	41
1 1/2	40	DA52	109	125	200	141	30	41
2	50	DA63	123	136	221	164	35	45

For valve and actuator specifications refer to: FIG LN240 (2 Piece Screwed) and FIG 82 (Pneumatic Actuators)

Actuated packages are supplied fully assembled and tested. Actuator sizing based on 5.5 bar air supply

FIG 241-SR supplied with Fail Open and Fail Closed options

For additional options (silencers, switchboxes and solenoids) refer to our Accessories section

FIG 241-DA supplied Stay Put as standard, with switchbox available

Media - For any application with media suitable to material of construction