


Ball Valves - Manual and Actuated

Nickel Plated Brass 2 Piece Screwed with SR / DA Pneumatic Actuator

FIG 250-SR with Spring Return Actuator

FIG 250-DA with Double Acting Actuator

Dimensions

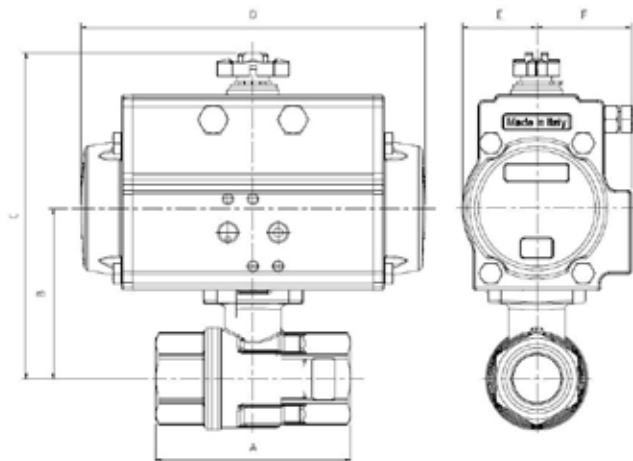

2 Piece Screwed with SR Actuator

Nominal Valve Size		Spring Return Actuator	A mm	B mm	C mm	D mm	E mm	F mm
in	mm							
1/4	8	SR52	67	59	134	141	30	41
3/8	10	SR52	67	59	134	141	30	41
1/2	15	SR52	67	59	134	141	30	41
3/4	20	SR52	76	61	136	141	30	41
1	25	SR52	90	72	147	141	30	41
1 1/4	32	SR52	102	75	150	141	30	41
1 1/2	40	SR75	114	99	195	210	42	52
2	50	SR75	138	108	204	210	42	52
2 1/2	65	SR100	165	138	246	275	55	68
3	80	SR100	188	148	256	275	55	68

2 Piece Screwed with DA Actuator

Nominal Valve Size		Double Acting Actuator	A mm	B mm	C mm	D mm	E mm	F mm
in	mm							
1/4	8	DA32	67	55	97	110	22	22
3/8	10	DA32	67	55	97	110	22	22
1/2	15	DA32	67	55	97	110	22	22
3/4	20	DA32	76	57	99	110	22	22
1	25	DA32	90	68	110	110	22	22
1 1/4	32	DA32	102	71	114	110	22	22
1 1/2	40	DA52	114	90	165	141	30	41
2	50	DA52	138	100	175	141	30	41
2 1/2	65	DA63	165	122	207	164	35	45
3	80	DA63	188	131	117	164	35	45

For valve and actuator specifications refer to: FIG 2500 (2 Piece Screwed) and FIG 82 (Pneumatic Actuators)

Actuated packages are supplied fully assembled and tested. Actuator sizing based on 5.5 bar air supply

FIG 250-SR supplied with Fail Open and Fail Closed options

For additional options (silencers, switchboxes and solenoids) refer to our Accessories section

FIG 250-DA supplied Stay Put as standard, with switchbox available

Media - For any application with media suitable to material of construction