


Ball Valves - Manual and Actuated

Nickel Plated Brass 3-Way L & T Port with Electric Actuator FIG 360L-EA / 350T-EA with Electric Actuator

Dimensions

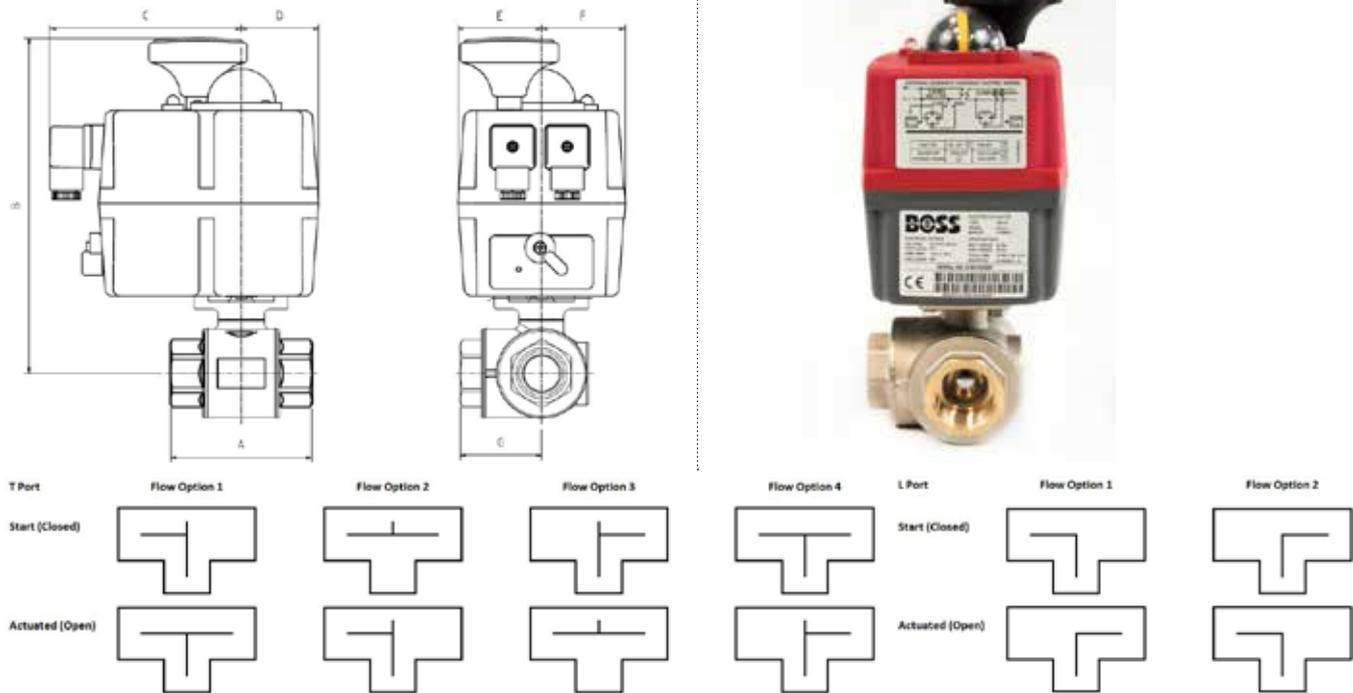

3-Way L Port with Electric Actuator 3-Way T Port with Electric Actuator With 110-240V AC/DC and 12-24V AC/DC options

| Nominal Valve Size | | Electric Actuator | A mm | B mm | C mm | D mm | E mm | F mm | G mm |
|--------------------|----|-------------------|---------|---------|---------|---------|---------|---------|---------|
| in | mm | | | | | | | | |
| 1/2 | 15 | Model 20 | 77 | 140 | 126 | 51 | 55 | 55 | 38 |
| 3/4 | 20 | Model 20 | 87 | 212 | 126 | 51 | 55 | 55 | 43 |
| 1 | 25 | Model 20 | 105 | 218 | 126 | 51 | 55 | 55 | 52 |
| 1 1/4 | 32 | Model 20 | 122 | 230 | 126 | 51 | 55 | 55 | 61 |
| 1 1/2 | 40 | Model 35 | 138 | 245 | 126 | 51 | 55 | 55 | 69 |
| 2 | 50 | Model 55 | 166 | 281 | 126 | 51 | 55 | 55 | 83 |

For valve and actuator specifications refer to: FIG 3600L (L Port), FIG 3500T (T Port) and BOSS EA218 (Electric Actuators)

The BOSS 360L-EA and BOSS 350T-EA are supplied fully assembled and tested

FIG 360L-EA offered with Flow Options 1 & 2

FIG 350T-EA offered with Flow Options 1, 2, 3 & 4

Can be supplied failsafe (fail open or closed). See our plug and play conversion kits (EA218 section)