


## Ball Valves

### Brass Full Bore - FIG 966EXT WRAS

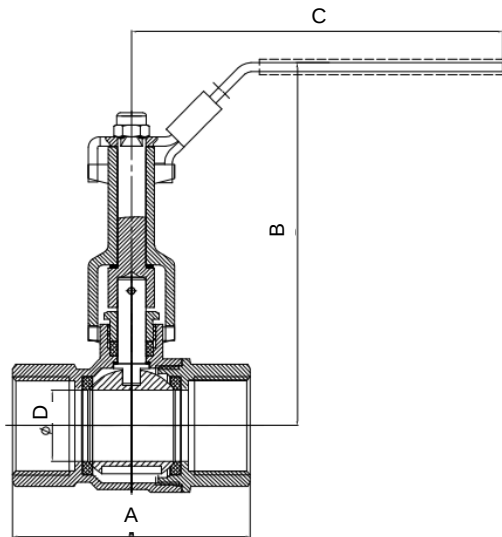

Lockable lever as standard

| Nominal Size<br>in | A<br>mm | B<br>mm | C<br>mm | D<br>mm | Weight kg | 966EXT<br>Extended Lever<br>Product Code |
|--------------------|---------|---------|---------|---------|-----------|------------------------------------------|
| 1/2                | 56.6    | 107.1   | 100     | 14.8    | 0.39      | 37184407                                 |
| 3/4                | 65.4    | 110.8   | 100     | 19      | 0.48      | 37184418                                 |
| 1                  | 80      | 122     | 125     | 24      | 0.75      | 37184429                                 |
| 1 1/4              | 90      | 129     | 140     | 32      | 1.01      | 37184440                                 |
| 1 1/2              | 97.6    | 137     | 140     | 40      | 1.46      | 37184451                                 |
| 2                  | 121.2   | 147.5   | 142     | 50      | 2.23      | 37184462                                 |

### Technical Specification

|                             |                                                 |        |
|-----------------------------|-------------------------------------------------|--------|
| Connections                 | Screwed BSPT Female to BS EN 10226-2:ISO 7-1 Rc |        |
| Non-Shock Temperature Range | -10°C to 120°C                                  |        |
| Pressure Rating             | 1/4" to 1"                                      | 40 bar |
|                             | 1 1/4" to 2"                                    | 32 bar |

Conforms to BS EN 13547

WRAS Approved

PED directive classification Group 1 and 2

### Materials of Construction

|                    |                                          |
|--------------------|------------------------------------------|
| Body               | Brass (Nickel plated) BS EN 12420 CW617N |
| End Connector      | Brass (Nickel plated) BS EN 12420 CW617N |
| Ball               | Brass (Chrome plated) BS EN 12420 CW617N |
| Anti Blow Out Stem | Brass BS EN 12164 CW614N                 |
| Seats              | PTFE                                     |
| Gland 'O' Ring     | PTFE                                     |
| Lever              | Steel (Zinc plated) Red PVC Sleeve       |