


Ball Valves

Brass Full Bore - FIG 966LS Lockshield WRAS

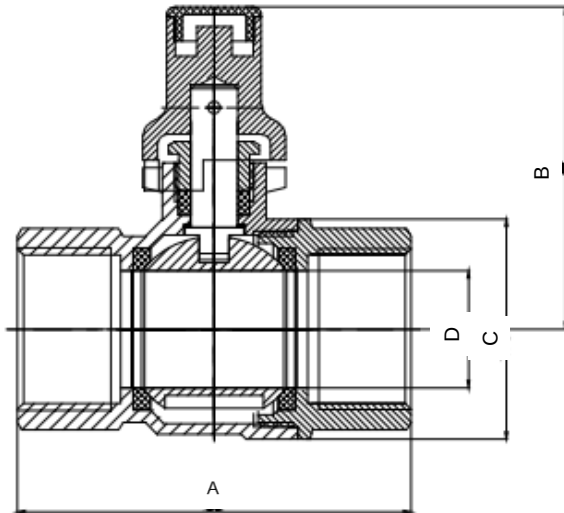

Nominal Size in	A mm	B mm	C mm	D mm	Weight kg	966LS Lockshield Product Code
1/2	56.6	53.8	31.3	15	0.25	37184503
3/4	65.4	57.5	37.7	19	0.32	37184514
1	80	65.8	45	24	0.56	37184525
1 1/4	90	78.5	56	32	0.80	37184536
1 1/2	97.6	87.8	69.5	40	1.15	37184547
2	121.2	94.5	85.5	50	1.95	37184558

Operating Key	Code
Set of lockshield keys	25017415

Technical Data

Connections	Screwed BSPT Female to BS EN 10226-2:ISO 7-1 Rc
Non-Shock Temperature Range	-10°C to 120°C
Pressure Rating	1/4" to 1" 40 bar
	1 1/4" to 2" 32 bar

Conforms to BS EN 13547

WRAS Approved

PED directive classification Group 1 and 2

Materials of Construction

Body	Brass (Nickel plated) BS EN 12420 CW617N
End Connector	Brass (Nickel plated) BS EN 12420 CW617N
Ball	Brass (Chrome plated) BS EN 12420 CW617N
Anti Blow Out Stem	Brass BS EN 12164 CW614N
Seats	PTFE
Gland 'O' Ring	PTFE
Operating Key	Bronze