


Ball Valves

Brass Full Bore - FIG 966SRL and 966SBL WRAS

Dimensions

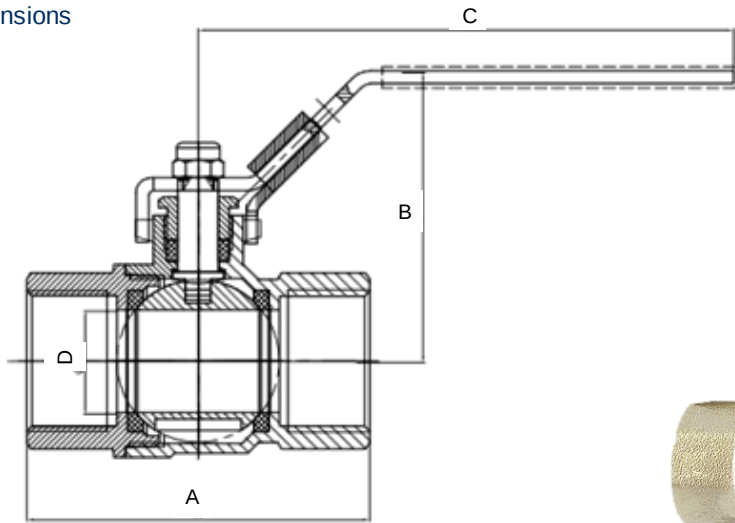

Lockable lever as standard

Nominal Size in	A mm	B mm	C mm	D mm	Weight kg	966SRL Red Lever Product Code	966SBL Blue Lever Product Code
1/4	43.4	44.7	90	8	0.17	37184204	37184108
3/8	45.4	47.8	90	10	0.16	37184215	37184119
1/2	56.6	52.6	100	15	0.25	37184226	37184130
3/4	65.4	56.3	100	19	0.34	37184237	37184141
1	80	67.8	125	24	0.57	37184248	37184152
1 1/4	90	79.5	140	32	0.82	37184259	37184163
1 1/2	97.6	85	140	40	1.16	37184270	37184174
2	121.2	93.5	160	50	1.93	37184281	37184185

Technical Specification

Connections	Screwed BSPT Female to BS EN 10226-2:ISO 7-1 Rc		
Non-Shock Temperature Range	-10°C to 120°C		
Pressure Rating	1/4" to 1"	40 bar	
	1 1/4" to 2"	32 bar	

Conforms to BS EN 13547

WRAS Approved

PED directive classification Group 1 and 2

Materials of Construction

Body	Brass (Nickel plated) BS EN 12420 CW617N
End Connector	Brass (Nickel plated) BS EN 12420 CW617N
Ball	Brass (Chrome plated) BS EN 12420 CW617N
Anti Blow Out Stem	Brass BS EN 12164 CW614N
Seats	PTFE
Gland 'O' Ring	PTFE
Lever	Steel (Zinc plated) Red / Blue PVC Sleeve