


Ball Valves

Brass Full Bore - FIG 967SRL and 967SBL WRAS

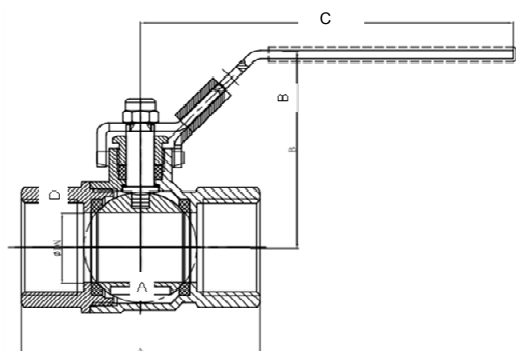

Lockable lever as standard

Nominal Size mm	A mm	B mm	C mm	D mm	Weight kg	967SRL Red Lever Product Code	967SBL Blue Lever Product Code
2 1/2	149.2	122	230	64	3.70	37184706	37184643
3	172.8	130.5	230	77	5.15	37184717	37184654
4	203.6	149	250	99	8.46	37184728	37184665

Technical Data

Connections		Screwed BSPT Female to BS EN 10226-2:ISO 7-1 Rc
Non-Shock Temperature Range		-10°C to 120°C
Pressure Rating	2 1/2" to 3"	25 bar
	4"	20 bar
Maximum Temperature at 10 bar	2 1/2" to 3"	180°C
Maximum Temperature at 10 bar	4"	170°C
Conforms to BS EN 13547		
WRAS Approved		
PED directive classification Group 1 and 2		

Materials of Construction

Body	Brass (Nickel plated) BS EN 12420 CW617N
End Connector	Brass (Nickel plated) BS EN 12420 CW617N
Ball	Brass (Chrome plated) BS EN 12420 CW617N
Anti Blow Out Stem	Brass BS EN 12164 CW614N
Seats	PTFE
Gland 'O' Ring	PTFE
Lever	Steel (Zinc plated) Red / Blue PVC Sleeve