



BOSS™ 282 CF Calflow® Plus

Step by step guide to installation

BOSS™ 282 CF Calflow® Plus combines filtration and isolation valve and a flow restrictor in one compact design.

Restricting the flow of water to various appliances throughout the home can save the end user money and energy.

BOSS™ 282 CF Calflow® Plus is easy to install simply follow this basic step by step guide for a trouble free installation.




1 Choose the flow rate needed for your application (for example a 6 litre/min for a basin).



2 Isolate and drain the supply then mark the area of pipe that needs to be removed. (52mm)




3 Making sure the water supply is off, use a suitable cutting tool to remove the pipe taking care to leave room for installation and future servicing.

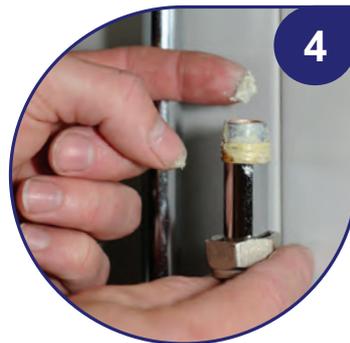

4 Fit the nut and olive over the now open end of the tube using a suitable sealing compound around the olive.



5 Insert the BOSS™ 282 CF Calflow® Plus body into the supply pipe taking care to make sure the tube reaches the "stop" points in the valve body. Check the direction of flow.

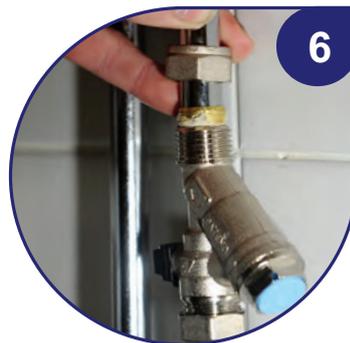

6 Having measured and cut the correct amount of tube, install the nut and olive for the outlet



Step by step guide to installing BOSS™ 282 CF Calflow® Plus



7

Isolate and turn water on to check the inlet connection for leaks. Reinststate water supply and check the top connection for leaks. Isolate again and remove the plug over a suitable container.



8

Allow the valve to drain and then flush through any installation debris.



9

Remove the strainer and cartridge and clean. Check the filter for any remaining debris.



10

Reinstall the filter 9 and flow regulator.



11

Tighten the cap, turn on and check for leaks.



12

Check the outlet at the tap and note the now reduced flow rate.