


Domestic	Commercial	Recommended Applications
✓		New Build - Residential
✓		DIY
✓		Domestic
✓	✓	Social Housing
	✓	Junior Schools & Nurseries
	✓	Senior Schools & Universities
	✓	Hospitals
	✓	Hospital Public Areas
	✓	Care Centres
	✓	Office - Commercial
	✓	Hotels
	✓	Hotel Public Areas
	✓	Leisure
	✓	Public Utilities

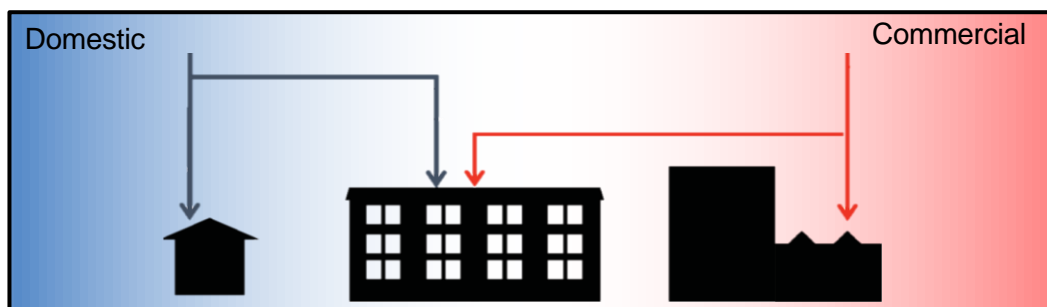

Feature	Domestic	Commercial
Valve Body	• Bi Directional	• Bi Directional
Plating	• Chrome	• Chrome
ID Code on body	• Yes	• Yes
Size	• 1/2"x15mm 1/2"	• 1/2"x15mm 1/2"
Matching Lock shield	• Chrome LS, BS2767-10. Rising	• Chrome LS, BS2767-10 Non Rising,
Valve Drives	• Octagonal	• Hexagon
Connections	• Compression / Iron	• Compression / Iron
Head Sensor	• Wax Sensor	• Liquid Sensor
Pre Setting	• No	• Yes
Range Limiting	• Yes	• Yes
Thermal Ring	• Metal	• Metal
Frost Setting	• Yes	• Yes
Security Options	• No	• Yes
Lift & Lock	• No	• Yes
Temp Range °C	• 0 Shut off, 7 Frost, Temp range (11 – 29)	• 0 Shut off, 7 Frost, Temp range (11 – 29)
Shut Off	• Positive Shut Off	• Positive Shut Off
Thermal Finish	• White & CP Version	• White
Maximum Test Pressure	• 15 bar	• 15 bar
Maximum Static Pressure	• 10 bar @ 120°C	• 10 bar @ 120°C
Maximum Differential Pressure	• 0.6 bar (Recom'd 0.2bar) to avoid hydronic noise	• 0.6 bar
Maximum Water Flow Temp	• 90°C	• 120°C
Approval	• EN215	• EN215
Guarantee	• 5 Year Guarantee	• 5 Year Guarantee
Tell Efficiency Rating	• A Rated	• A Rated
Manufacturing	• Manufactured on the UK	• Manufactured on the UK
Packaging	• Branded Box	• Branded Box
Energy Savings	• Yes	• Yes
Tamper Proof	• No	• Yes
Flow Adjustment	• No	• Yes