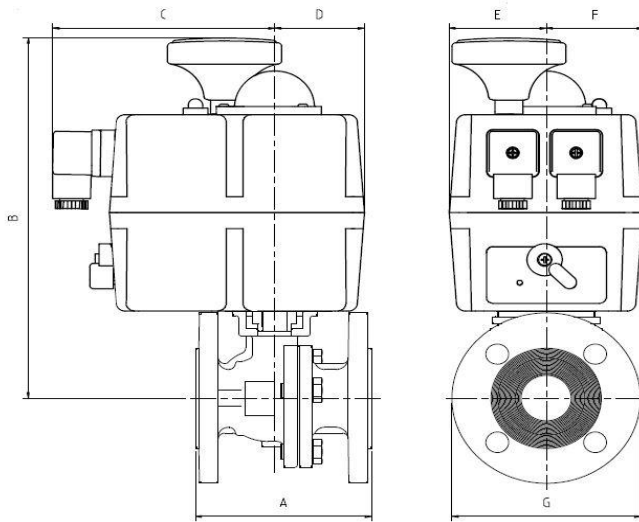


FIG 204-EA - with Electric Actuator

Dimensions


2 Piece Flanged CLASS 150 Electric Actuator
Models 20-85 with 24-240V AC/DC
Models 140-300 with High Voltage 110-240V AC/DC and Low Voltage 24V AC/DC options

Nominal Valve Size in	mm	Electric Actuator	A mm	B mm	C mm	D mm	E mm	F mm	G mm
1/2	15	Model 20	108	245	126	51	55	55	90
3/4	20	Model 20	117	250	126	51	55	55	100
1	25	Model 20	127	258	126	51	55	55	110
1 1/2	40	Model 35	165	249	126	51	55	55	125
2	50	Model 55	178	287	126	51	55	55	150
2 1/2	65	Model 85	190	302	126	51	55	55	180
3	80	Model 140	203	364	128	107	107	107	190
4	100	Model 140	229	384	128	107	107	107	230
6	150	Model 300	394	417	128	107	107	107	280

For valve and actuator specifications refer to: FIG 203B (2 Piece CLASS 150) and BOSS EA218S (Electric Actuators)

The BOSS 204-EA is supplied fully assembled and tested

Can be supplied failsafe (fail open or closed), or modulating (0-10V or 4-20mA). See our plug and play conversion kits (EA218S section)